

## Product Datasheet

### P-PACK UNDERDESK UNITS



## PRODUCT DESCRIPTION

Underdesk power units with individually fused UK sockets, and master/individual switch options.

- Individually fused power sockets
- Complies with BS6396:2022
- 150mm earth lead to ring terminal
- BS5733 3<sup>rd</sup> party approval
- 3 pole connector input/output
- Daisy chain from one unit to another via the use of Inter leads


## STANDARD PRODUCTS

| Part Code  | No. of Power      | Switch        | Dimensions        |
|------------|-------------------|---------------|-------------------|
| P-Pack 2   | 2 x 5A sockets    | n/a           | 236 x 42.5 x 62mm |
| P-Pack 2/2 | 2 x 5A sockets    | 2 x switches  | 236 x 46.7 x 62mm |
| P-Pack 3   | 3 x 3.15A sockets | n/a           | 285 x 42.5 x 62mm |
| P-Pack 3/1 | 3 x 3.15A sockets | Master switch | 285 x 46.7 x 62mm |
| P-Pack 4   | 4 x 5A sockets    | n/a           | 334 x 42.5 x 62mm |
| P-Pack 4/1 | 4 x 5A sockets    | Master switch | 363 x 46.7 x 62mm |
| P-Pack 4/4 | 4 x 5A sockets    | 4 x switches  | 398 x 46.7 x 62mm |
| P-Pack 6   | 6 x 3.15A sockets | n/a           | 464 x 42.5 x 62mm |
| P-Pack 6/1 | 6 x 3.15A sockets | Master switch | 493 x 46.7 x 62mm |

## INSTALLATION

Underdesk units can be installed either into a wire basket cable management system, or directly to the under desk.

The unit has mounting brackets either end for either cable tying to a basket or screwing directly to a desk.

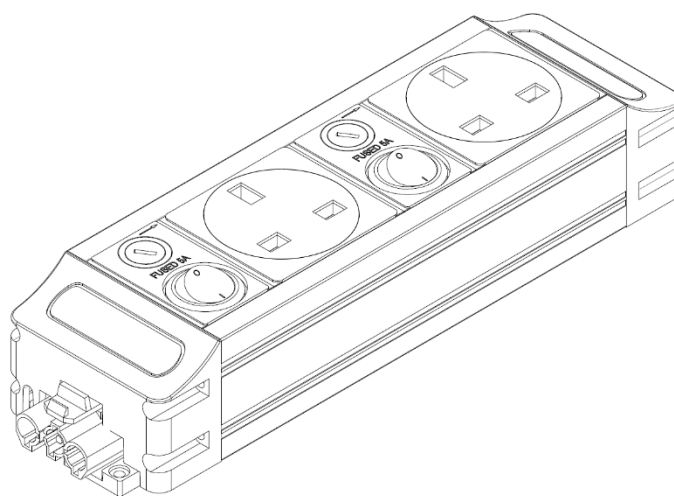

## USAGE & MAINTENANCE

Not to be used with products and appliances exceeding the rating of the socket (3.15A for a 3-way or 6-way, or 5A for a 2-way or 4-way)

Fuses are 5x20mm and can be user-replaced.

To replace a fuse, disconnect the unit from the mains first.

To clean unit, disconnect from the mains, and wipe with a clean damp cloth

## TECHNICAL SPECIFICATION

|                 |   |
|-----------------|---|
| Construction    | PVC extrusion, PVC sockets and fascias                    |
| Max voltage     | 250V  |
| Fuse rating     | 3.15A or 5A   |
| Fuse size/type  | 5x20mm ceramic slow blow                                  |
| Mains connector | 20A male 3-pole connector                                 |
| Conformities    | BS 1363; BS 6396:2008; BS 5733; IEC60884-1:2006; UL 94V-0 |
| Switch          | Single pole with neon indicator                           |
| Compliances     | RoHS; WEEE; CE; UKCA                                      |