

Product Datasheet

## P-PACK UNDERDESK UNITS

With Dual USB chargers



### PRODUCT DESCRIPTION

Underdesk power units with individually fused UK sockets, and USB A+C chargers

- Individually fused power sockets
- Complies with BS6396:2022
- 150mm earth lead to ring terminal
- BS5733 3<sup>rd</sup> party approval
- 3 pole connector input/output
- Daisy chain from one unit to another via the use of Inter leads
- Dual USB charger with 1 x USB A and 1 x USB C


### STANDARD PRODUCTS

Part Code	No. of Power	USB	Dimensions
P-Pack 4U	4 x 5A sockets	Dual USB A+C	396 x 42.5 x 62mm
P-Pack 6U	6 x 3.15A sockets	Dual USB A+C	526 x 42.5 x 62mm

## INSTALLATION

Underdesk units can be installed either into a wire basket cable management system, or directly to the under desk.

The unit has mounting brackets either end for either cable tying to a basket or screwing directly to a desk.

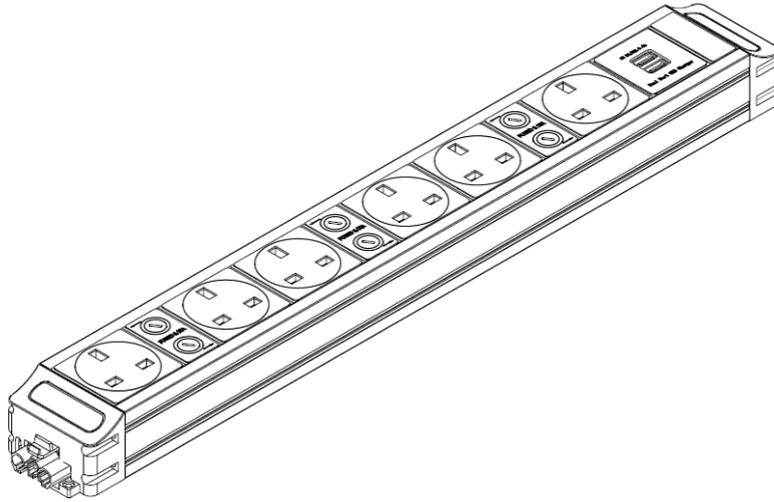

## USAGE & MAINTENANCE

Not to be used with products and appliances exceeding the rating of the socket (3.15A for a 6-way, or 5A for a 4-way)

Fuses are 5x20mm and can be user-replaced.

To replace a fuse, disconnect the unit from the mains first.

To clean unit, disconnect from the mains, and wipe with a clean damp cloth

## TECHNICAL SPECIFICATION

Construction	PVC extrusion, PVC sockets and fascias
Max voltage	250V
Fuse rating	3.15A or 5A
Fuse size/type	5x20mm ceramic slow blow
USB	USB output type A and type C, Max 18W USB A: QC3.0, DC 5V3A, 9V2A, 12V1.5A USB C: PD, DC5V3A, 9V2A, 12V1.5A A+C together, DC5V3.4A
Mains connector	20A male 3-pole connector
Conformities	BS 1363; BS 6396:2008; BS 5733; IEC60884-1:2006; UL 94V-0
Switch	Single pole with neon indicator
Compliances	RoHS; WEEE; CE; UKCA